

AD-A244 653



Carnegie Mellon University  
Software Engineering Institute

2

# Serpent

## Ada S<sub>D</sub> D Application Developer's Guide

DTIC

ELECTE

JAN 17 1992

92-01309



System for User  
Interface Development

Version  
1

Date  
August 1991

This document has been approved  
for distribution and sale; its  
distribution is unlimited.

92. 1. 15 009

## User's Guide

August 1991


CMU/SEI-91-UG-7

# Serpent: Ada Application Developer's Guide



Accession For	
NTIS CR451	<input checked="" type="checkbox"/>
DTIC 173	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution	
Approved by	
Dist	Approved for
A-1	

User Interface Project



Approved for public release.  
Distribution unlimited.

**Software Engineering Institute**

Carnegie Mellon University  
Pittsburgh, Pennsylvania 15213

This document was prepared for the


SEI Joint Program Office  
ESD/AVS  
Hanscom AFB, MA 01731

The ideas and findings in this document should not be construed as an official DoD position. It is published in the interest of scientific and technical information exchange.

#### **Review and Approval**

This document has been reviewed and is approved for publication.

FOR THE COMMANDER

  
Charles J. Ryan, Major, USAF  
SEI Joint Program Office

The Software Engineering Institute is sponsored by the U.S. Department of Defense.  
This report was funded by the Department of Defense.

Copyright © 1991 by Carnegie Mellon University.

This document is available through the Defense Technical Information Center. DTIC provides access to and transfer of scientific and technical information for DoD personnel, DoD contractors and potential contractors, and other U.S. Government agency personnel and their contractors. To obtain a copy, please contact DTIC directly: Defense Technical Information Center, Attn: FDRA, Cameron Station, Alexandria, VA 22304-6145.

Copies of this document are also available through the National Technical Information Service. For information on ordering, please contact NTIS directly: National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161.

Use of any trademarks in this document is not intended in any way to infringe on the rights of the trademark holder.

The Software Engineering Institute is not responsible for any errors contained in these files or in their printed versions, nor for any problems incurred by subsequent versions of this documentation.

# Table of Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	This Manual	1
1.1.1	Organization	1
1.1.2	Typographical Conventions	2
1.2	Other Serpent Documents	2
<b>2</b>	<b>Overview</b>	<b>5</b>
2.1	Serpent Architecture	5
2.2	Shared Database	7
2.3	Application Development	10
<b>3</b>	<b>Specifying the Contract</b>	<b>13</b>
3.1	Defining Shared Data	13
3.2	Data Types and Values	15
3.3	Initialization and Cleanup	18
<b>4</b>	<b>Modifying Information</b>	<b>21</b>
4.1	Sending Transactions	21
4.2	Adding Static Information	22
4.3	Modifying Information	24
4.4	Removing Information	25
<b>5</b>	<b>Retrieving Information</b>	<b>27</b>
5.1	Retrieving Transactions	27
5.2	Incorporating Changes	28
5.3	Examining Changes by Component	29
<b>6</b>	<b>Finishing the Application</b>	<b>33</b>
6.1	Error Checking	33
6.2	Recording Transactions	33
6.3	Dialogue Initiated Exit	34
<b>7</b>	<b>Testing and Debugging</b>	<b>37</b>
7.1	Formatting Recordings	37

7.2	Playback	38
Appendix A	Data Structures	39
Appendix B	Routines	47
Appendix C	Commands for Testing Serpent Applications and Dialogues	83
Appendix D	Spider Example	87

## List of Figures

<b>Figure 1-1</b>	Serpent Documents	4
<b>Figure 2-1</b>	Serpent Architecture	6
<b>Figure 2-2</b>	Shared Database	8
<b>Figure 2-3</b>	Shared Data Instantiation	9
<b>Figure 2-4</b>	Spider Chart Display	11





# List of Examples

<b>Example 3-1</b>	Spider Shared Data Definition File	14
<b>Example 3-2</b>	Ada Language Package	15
<b>Example 3-3</b>	Shared Data Definition	15
<b>Example 3-4</b>	Generated Ada Package	16
<b>Example 3-5</b>	Serpent Data Type	16
<b>Example 3-6</b>	Assigning Values to String Components	16
<b>Example 3-7</b>	Assigning Values to Integer, Boolean, or Real Components	17
<b>Example 3-8</b>	Buffer Structure	17
<b>Example 3-9</b>	Assigning Values to Buffer Components	17
<b>Example 3-10</b>	Setting Component Values to Undefined	18
<b>Example 3-11</b>	Serpent Initialization	18
<b>Example 4-1</b>	Sending Transactions	21
<b>Example 4-2</b>	Adding Information to the Shared Database	23
<b>Example 4-3</b>	Modifying Information in the Shared Database	25
<b>Example 4-4</b>	Removing Information from the Shared Database	26
<b>Example 5-1</b>	Transaction Processing	28
<b>Example 5-2</b>	Processing Changes to Shared Data Records (Simple Programs)	29
<b>Example 5-3</b>	Processing Changes to Shared Data Records (Large Systems)	30
<b>Example 6-1</b>	Examining Status	33
<b>Example 6-2</b>	Recording Transactions	34
<b>Example 7-1</b>	Formatting the Recording File	37
<b>Example 7-2</b>	Testing the Application	38



# 1 Introduction

Serpent is a user interface management system (UIMS) that supports the development and execution of a user interface of a software system. Serpent supports incremental development of the user interface from the prototyping phase through production to maintenance or sustaining engineering. Serpent encourages a separation of functionality between the user interface and functional portions of a software system. Serpent is also easily extended to support additional user interface toolkits.

## 1.1 This Manual

This manual describes how to develop applications using Serpent. Readers are assumed to have read and understood the concepts described in the *Serpent Overview*, as well as to have had experience using the Ada programming language.

### 1.1.1 Organization

The contents of this guide include:

- **Introduction and Overview.** This chapter provides a general description of the role of an application in a software system developed with Serpent. It also describes a conceptual framework for application development.
- **Specifying the Contract.** This chapter describes the tasks necessary to define the type, structure and values of data to be shared between an application program and Serpent and to establish runtime communications with Serpent.
- **Modifying Information.** This chapter describes the tasks necessary to add, modify or remove information to/from the Serpent shared database.
- **Retrieving Information.** This chapter describes the tasks necessary to define and retrieve changes to information from the Serpent shared database.
- **Finishing the Application.** This chapter describes the finishing touches that should be applied to the application, including error checking and exception handling.
- **Testing and Debugging.** This chapter describes utilities available to assist in the testing and debugging of the application.
- **Appendix A: Data Structures.** This appendix is a complete reference of all the constants, types, routines, and other data structures available to Serpent application developers using the Ada programming language.

- **Appendix B: Routines.** This appendix is a complete reference of all the routines available to Serpent application developers using the Ada programming language.
- **Appendix C: Commands for Testing Serpent Applications and Dialogues.** This appendix is a reference of commands available to Serpent application developers from the operating system.
- **Appendix D: Spider Example.** This appendix is a complete application example, developed in the Ada programming language.

### 1.1.2 Typographical Conventions

Code examples	Courier typeface
Code directly related to text	<b>Bold, courier typeface</b>
Variables, attributes, etc.	Courier typeface
Syntax	Courier typeface
Warnings and cautions	<b><i>Bold, italics</i></b>

## 1.2 Other Serpent Documents

The purpose of this guide is to provide the information necessary to develop Serpent applications. The following publications address other aspects of Serpent.

### *Serpent Overview*

Introduces the Serpent system.

### *Serpent: System Guide*

Describes installation procedures, specific input/output file descriptions for intermediate sites and other information necessary to set up a Serpent application.

### *Serpent: Saddle User's Guide*

Describes the language that is used to specify interfaces between an application and Serpent.

### *Serpent: Dialogue Editor User's Guide*

Describes how to use the editor to develop and maintain a dialogue.

### *Serpent: Slang Reference Manual*

Provides a complete reference to Slang, the language used to specify a dialogue.

*Serpent: C Application Developer's Guide*

Describes how the application interacts with Serpent. This guide describes the runtime interface library, which includes routines that manage such functions as timing, notification of actions, and identification of specific instances of the data.

*Serpent: Guide to Adding Toolkits*

Describes how to add user interface toolkits, such as various Xt-based widget sets, to Serpent or to an existing Serpent application. Currently, Serpent includes bindings to the Athena Widget Set and the Motif Widget Set.

The following figure shows Serpent documentation in relation to the Serpent system:

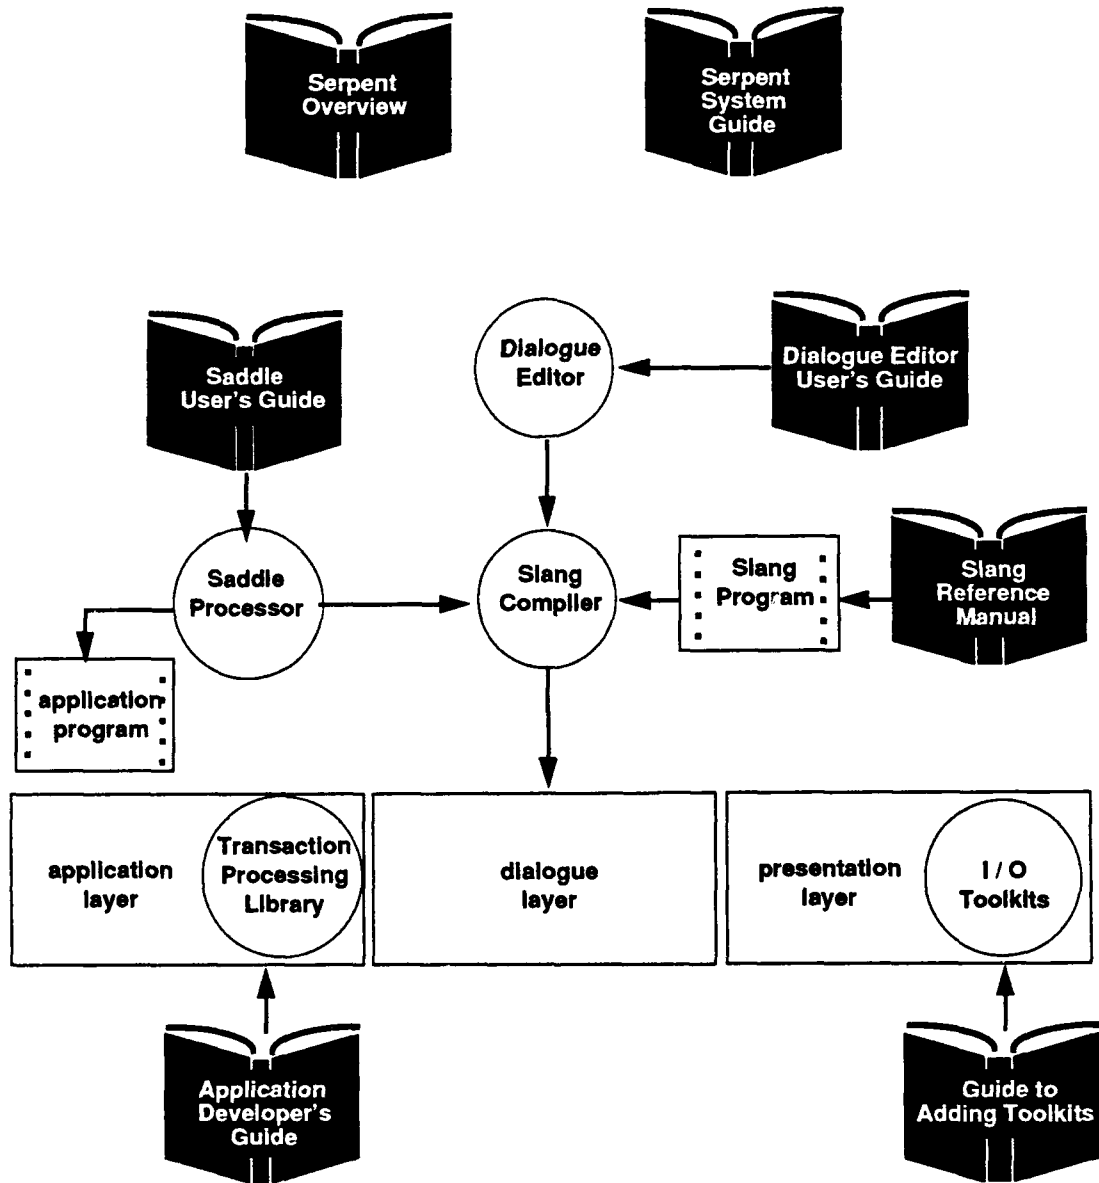


Figure 1-1 Serpent Documents


## 2 Overview

A main goal of Serpent is to encourage the separation of a software system into an application portion and a user interface portion to provide the application developer with a presentation-independent interface. The application portion consists of those components of a software system that implement the “core” application functionality of a system. The user interface portion consists of those components that implement an end-user dialogue. A dialogue is a specification of the presentation of application information and end-user interactions.

During the design stage, the system designer decides which functions belong in the application component and which belong in the user interface component of the system.

### 2.1 Serpent Architecture

Serpent is implemented using a standard UIMS architecture. This architecture (see Figure 2-1) consists of three major layers: the *presentation layer*, the *dialogue layer*, and the *application layer*. The three different layers of the standard architecture are viewed as providing differing levels of end-user feedback.

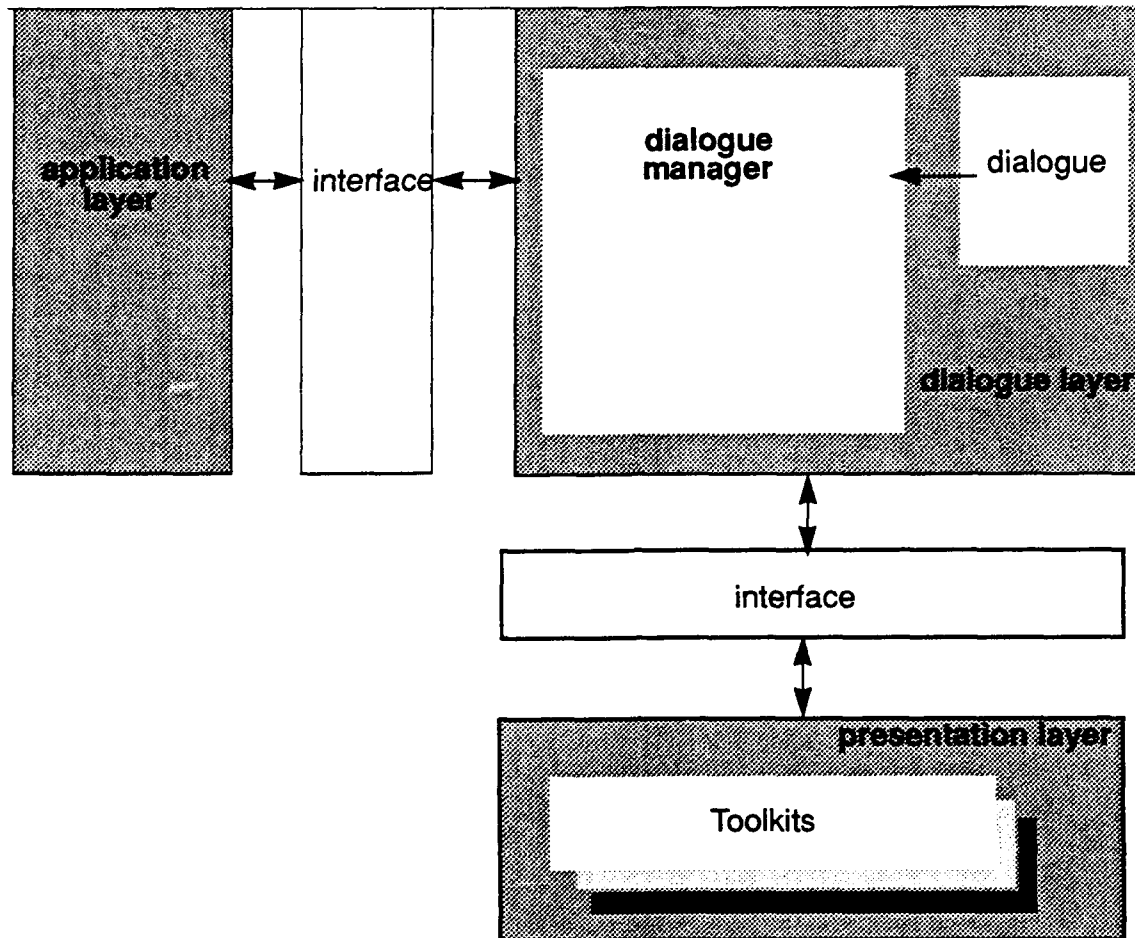

**Figure 2-1 Serpent Architecture**

The presentation layer consists of various input/output toolkits that have been incorporated into Serpent. Input/output toolkits are existing hardware/software systems that perform some level of generalized interaction with the end user. Serpent is being distributed with an interface to the X Window System, Version 11. Other input/output toolkits can be integrated with Serpent. See *Serpent: Guide to Adding Toolkits* for a discussion of how this can be accomplished.



One way of viewing the three levels of the architecture is the level of functionality provided for user input. The presentation layer is responsible for lexical functionality, the dialogue layer for syntactic functionality, and the application layer for semantic functionality. In terms of a menu example, the presentation layer has responsibility for determining which menu item was selected and for presenting feedback that indicates which choice is currently selected. The dialogue layer has responsibility for deciding whether another menu is presented and presenting it, or whether the choice requires application action. The application layer is responsible for implementing the command implied by the menu selection.


The end user interface for a software system is specified formally as a *dialogue*. The dialogue is executed by the dialogue manager at runtime in order to provide an end user interface for a software system. The dialogue specifies both the presentation of application information and end user interactions. The Serpent dialogue specification language (Slang) allows dialogues to be arbitrarily complex.

The application provides the functional portion of the software system in a presentation-independent manner. It may be developed in C, Ada, or other programming languages. The application may be either a functional simulation for prototyping purposes or the actual application in a delivered system. The actions of the application layer are based upon knowledge of the specific problem domain.

## 2.2 Shared Database

Serpent provides an active database model for specifying the user interface portion of a system. In an active database, multiple processes are allowed to update a database. Changes to the database are then propagated to each user of the database. This active database model is implemented in Serpent by a *shared database* that logically exists between the application and I/O toolkits. The application can add, modify, query, or remove data from the shared database. Information provided to Serpent by the application is available for presentation to the end user. The application has no knowledge of the presentation media or user interface styles used to present this information.

Information in the shared database may be updated by either the application or I/O toolkits. Figure 2-2 illustrates the use of the shared database in Serpent.

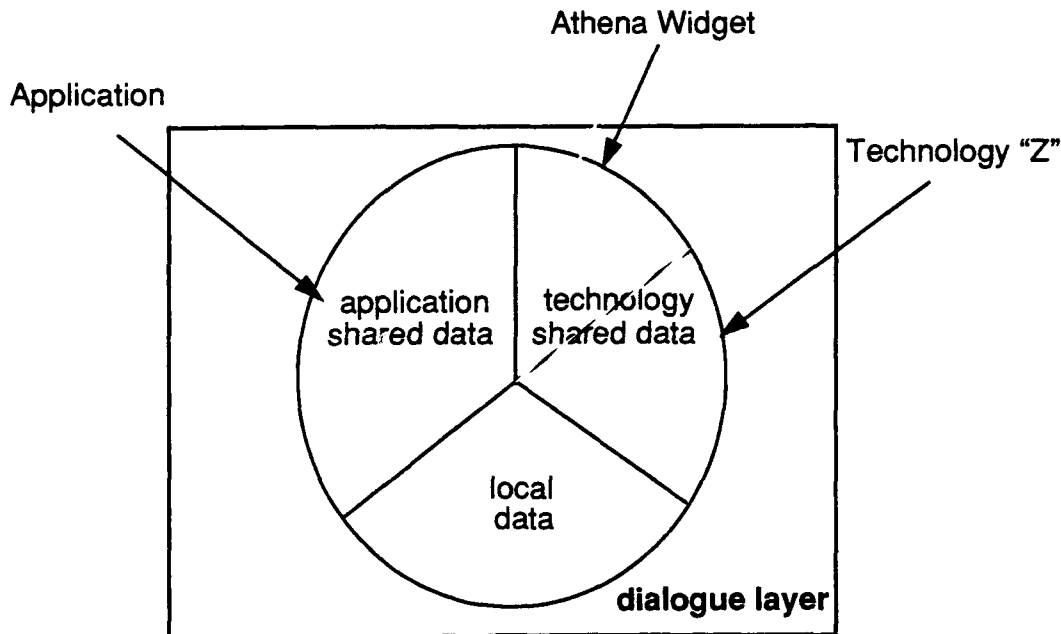


**Figure 2-2 Shared Database**

Serpent allows the specification of dependencies between elements in the shared database in the dialogue. These dependencies define a mapping among application data, presentation objects, and end user input. The dialogue manager enforces these dependencies by operating on the information stored in the shared database until the dependencies are met. Changes are then propagated to either the application or the I/O toolkits as appropriate. See the *Serpent: Slang Reference Manual* (CMU/SEI-91-UG-5) for a further discussion.

The *type* and *structure* of information that can be maintained in the shared database is defined externally in a *shared data definition file*. This corresponds to the database concept of *schemas*. A shared data definition file is required for each application.

A shared data definition file consists of both aggregate and scalar data structures. Top-level data structures become *shared data* elements that may be instantiated at runtime. Nested data structures become components that are considered part of the shared data element. Serpent does not allow nesting of records.

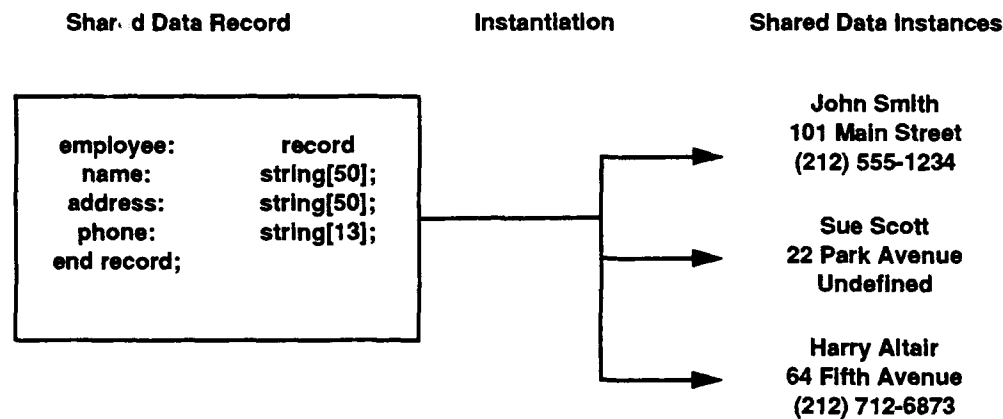

**Figure 2-3 Shared Data Instantiation**

It is possible to define multiple instances of a single shared data element. Shared data elements are instantiated by specifying the element name. Each *shared data instance* is identified by a unique *ID*. IDs must be maintained by the application to identify shared data instances when multiple instances of a single shared data element exist. Figure 2-3 provides an illustration of shared data instantiation.

Since the dialogue manager, the application, and any toolkits participating in a particular execution of Serpent are separate system processes that use the shared database, they can potentially modify the database concurrently, possibly compromising the integrity of the database. This problem is solved in Serpent through the use of database concurrency control techniques. Updates to the Serpent shared database are packaged in transactions. Transactions are collections of updates to the shared database that are logically processed at one time. Transactions can be *started*, *committed*, or *aborted*. A transaction which has been started but neither committed nor aborted yet is said to be *open*. Multiple transactions may be open at the same time. Committing a transaction causes the updates to be made to the shared database. Aborting a transaction causes termination of the transaction without any update of the shared database.

## **Communicating with Serpent**

The application communicates with Serpent using the shared database model described earlier in this document. Information added to shared data is available to be presented to the end user by the dialogue. Changes to application data are automatically communicated back to the application.

## **2.3 Application Development**

The application, or non-user interface portion of the system, provides the "core" functionality of a software system developed using Serpent. The application can be written in Ada, C, or other programming languages and can be either a simulation or an actual application.

An application may only add information to shared data or it may only retrieve information from shared data. For example, an application that monitors and displays the status of a computer network may only need to add information to shared data to update the display. An application such as an automatic teller machine (ATM) might only need to retrieve data from the user interface.

All transactions to and from the application are handled explicitly in the application using the routines and data structures available in the Serpent application interface. This document describes the usage and definitions of these routines and data structures.

## **Error Checking and Recovery**

Each routine in Serpent sets status on exiting. It is the responsibility of the application developer to check this status to perform appropriate error recovery. Serpent provides routines to both check and print the status.

## **Testing and Debugging**

Serpent provides a record/playback feature that can be used in testing and debugging. Transactions between the application and dialogue manager or between the dialogue manager and the various toolkits can be recorded, then played back at a later time. This is useful in isolating problems or in performing regression/stress testing of an application, dialogue, or toolkit.

## Spider Example

The spider application is an example of an application system developed using Serpent. Figure 2-4 is an illustration of a "spider chart" display that is one possible end-user interface for the application.

Adapted from a command and control application, the spider application monitors and displays the status of various sensor sites and their associated communication lines to the two correlation centers (Figure 2-4).

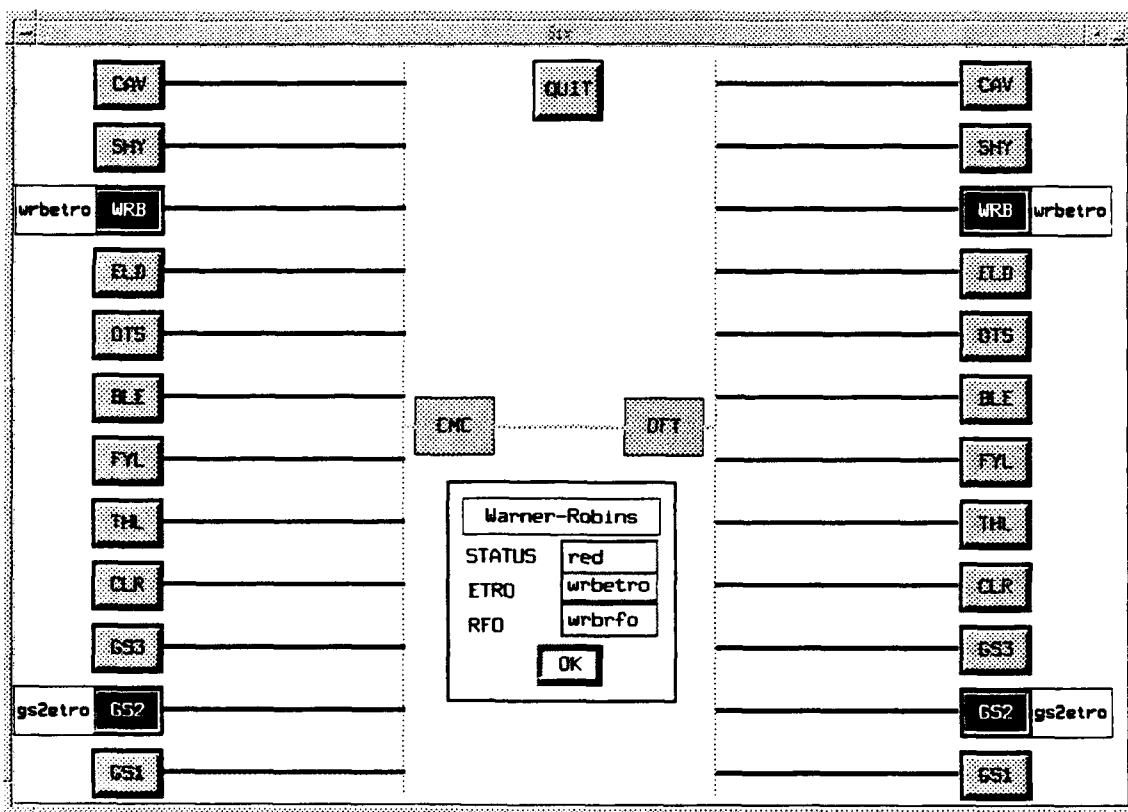


Figure 2-4 Spider Chart Display

The columns of rectangular boxes on the right and left sides of the spider chart display (for example, GS1, GS2) represent sensor sites. The rectangles in the middle of the display represent the correlation centers that collect information from the sensors. Each sensor site communicates with both correlation centers; this is represented by the duplication of sensor site boxes on both the right and left sides of the display. The lines represent communication lines between the sensor sites and the correlation centers. The status of sensors is represented by the shading of the rectangles. On a color display, the status would be represented using different background colors.

An operator may display detailed information concerning a sensor site by selecting a sensor site box corresponding to that sensor. This causes a detailed window to appear, displaying the status of the sensor, the date and time of the last message, the reason for outage (RFO) and the estimated time to returned operation (ETRO). These fields may be modified by the operator. Sensors may be in one of three states: operational, impaired, or down. For sensors that are not fully operational (i.e., the status is yellow) the ETRO is displayed to the outside of the sensor site box. ETROs are also displayed over communication lines that are not fully operational. The operator may also dynamically reconfigure the network<sup>1</sup> by adding/deleting sensors to/from the network.

---

<sup>1</sup>The capability of dynamically reconfiguring the network does not exist in the spider chart example distributed with Serpent Version 1.0.

## 3 Specifying the Contract

The first step in creating a software system using Serpent is to apportion system functionality between the dialogue and the application. This involves creating a contract between the two components: defining the type and structure of information to be communicated, or shared, between the two components; establishing the range of values of this data; and establishing runtime communication between the components.

### 3.1 Defining Shared Data

Shared data is information that is communicated or shared between the application and dialogue. Defining shared data involves two steps:

1. Create the shared data definition file.
2. Run the created file through the Saddle processor.

The following is a brief description of each of these two steps. The *Serpent: Saddle User's Guide* contains a more complete description of both these steps.

**Step 1: Create the shared data definition file.** The shared data definition file defines the type and structure of information that can be shared between the application and dialogue. The shared data definition is specified in Saddle. By convention, the file is given the name of the application, followed by the extension `.sdd`.

Example 3-1 is an example of a shared data definition file for the spider application. The content of the shared data definition file is independent of the implementation language used. Note that these shared data record templates contain only information to define the application objects; they do not specify how the information is presented to the end user.

```
<< spiderA >>

spider: shared data

  sensor_sdd: record
    site_abbr: string[3];
    status: integer;
    site: string[32];
    last_message: string[8];
    rfo_buffer[32];
    etro: string[8];
  end record;

  cc_sdd: record
    name: string[3];
    status: integer;
  end record;
```

```

communication_line_sdd: record
  from_sensor: id_of sensor_sdd;
  to_cc: id of cc_sdd;
  etro: string[8];
  status: integer;
end record;

end shared data;

```

### Example 3-1 Spider Shared Data Definition File

The file shown in Example 3-1 contains definitions for the data shared between the application and the dialogue for the spider application. The first line of the file contains the name (and possible path information) of the executable image of the application. This application is automatically executed by the *Serpent* command at runtime. (*Serpent: System Guide* contains a complete explanation of this process.) The three shared data record templates define the type and structure of the sensor, correlation center, and communication line application objects.

**Step 2: Run the created file through the Saddle processor.** Once the shared data has been defined in the file, it can be processed by Saddle to generate an Ada Package. This package will have the same name as the shared data definition file with a different extension. For example, the shared data file `spiderA.sdd` will generate the file `spiderA.ada`. This package can then be withed in the Ada application and used to declare local variables of the shared data types. The Ada package generated by running the shared data definition file shown in Example 3-1 through the Saddle processor is illustrated in Example 3-2.

```

MAIL_BOX: constant string := "SPIDERA_BOX";
ILL_FILE: constant string := "spiderA.ill";

type sensor_sdd is record
  self: id_type;           -- (no element pointer)
  site_abbrev: string (1..4);
  status: integer;
  site: string (1..51);
  last_message: string (1..9);
  rfo: string (1..51);
  etro: string (1..9);
end record;

type cc_sdd is record
  name: string(1..4);
  status: integer;
end record;

type communication_line_sdd is record
  from_sensor: id_type;           -- (no element

```



```

pointer)
    to_cc: integer;
    etro: string (1..9);
    status: integer;
end record;

type communication_line_sdd_ptr is access
communication_line_sdd;

end spiderA;

```

### Example 3-2 Ada Language Package

In Example 3-2, the first two lines in the file define two well-known constants: MAIL\_BOX and ILL\_FILE. These constants will be used in initializing Serpent. The three structures correspond to the record templates defined within the shared data definition file.

## 3.2 Data Types and Values

One output of processing the shared data definition file through the Saddle processor is an Ada package containing corresponding Ada structures for the shared data records. These Ada structures can be used to declare local variables that correspond in size and structure to shared data records. Components of shared data records can be declared as any of the following types: boolean, integer, real, string, ID or buffer. The Ada records generated from these declarations depend on the type of the components. Example 3-3 is unrelated to the spider example used throughout this guide but includes a description of a shared data record that contains an example of each type of component.

```

employee_sdd: record
    name: string[32];
    salary: integer;
    exempt: boolean;
    experience: real;
    job_desc: buffer;
    self: id of employee_sdd;
end record;

```

### Example 3-3 Shared Data Definition

Example 3-4 shows the Ada package that is generated when the `employee_sdd` record is processed by Saddle processor.

```
type employee_sdd is record
  name: string (1..33);
  salary: integer;
  exempt: boolean;
  experience: float;
  job_desc: buffer;
  self: id_type;
end record;
```

### Example 3-4 Generated Ada Package

Although each shared data component is now represented using an Ada language specific type, there is still a Serpent data type associated with each of them. The Serpent data type can be determined at runtime using the `get_shared_data_type` function illustrated in Example 3-5. The `serpent_data_type` is an enumeration of the different Serpent data types and is defined in Appendix A.

```
serpent_data_type type;
--
-- Get the Serpent type of the employee record salary
-- component.
--
type := S.Get_Shared_Data_Type("employee", "salary");
```

### Example 3-5 Serpent Data Type

Shared data values specified as strings in the shared data definition file are represented by strings in the Ada package generated by the Saddle processor. It is therefore not necessary to allocate memory for these strings, although it is necessary to convert the strings to null terminated strings.

```
--
-- Declare a local shared data variable.
--
employee: employee_sdd;
--
-- null terminate string.
--
employee.name := "Harry Alter" & ASCII.NUL;
```

### Example 3-6 Assigning Values to String Components

Shared data components of type integer, boolean, real, or ID can be assigned directly to Ada language variables. IDs are returned from a number of Serpent routines and are `id_type`. Saddle integers and booleans correspond to the equivalent Ada types and Saddle reals are actually of Ada type float. (See Example 3-7.)

```
--
-- Integer, boolean, or real components can be set
-- directly.
--
employee.salary := 45000;
employee.exempt := FALSE;
employee.experience := 3.2;
```

### Example 3-7 Assigning Values to Integer, Boolean, or Real Components

Buffer is the only dynamic shared data type in that neither the size nor the type of the information is predefined. Example 3-8 describes the buffer structure. Buffer type is required and specifies the type of information stored in the buffer. Buffer length is the size in bytes of the data and is required even if the data is of a well known type (i.e., integer). Buffer body is a pointer to the actual data. The space used to maintain this data is not part of the buffer structure and must be managed by the user.

```
type buffer is record
  type: shared_data_types
  length: integer;
  body: system.address;
```

### Example 3-8 Buffer Structure

Buffers can be used to:

- Share untyped, contiguous data.
- Share large amounts of contiguous data (i.e., large strings).
- Provide variant records.

Example 3-9 contains the example of the `employee.job_desc` buffer being used as a string.

```
--
-- This buffer is being used as a string.
--
employee.job_desc.type := sd_string;
string_variable := "Look busy";
employee.job_desc.length := string_variable'length;
employee.job_desc.body := string_variable'address;
```

### Example 3-9 Assigning Values to Buffer Components

Shared data values can also be undefined. All uninitialized components of a shared data record instance created using the `add_shared_data` function are initialized by Serpent to be undefined. On the other hand, components of a local, shared data variable have whatever values are left by the system—most likely zeros. If this structure is used to initialize the shared data instance (with the `add_shared_data` or `put_shared_data` routines), all the components of the instance are initialized with these values. Components of local, shared data variables can be explicitly set to undefined using the `set_undefined` routine illustrated in Example 3-10. The `is_undefined` function can be used to determine if a component value is undefined.

```
--
-- The set_undefined function is used to set the value of
-- a component to undefined.
*/
set_undefined(sd_buffer, employee.job_desc'address);
```

**Example 3-10** Setting Component Values to Undefined

### 3.3 Initialization and Cleanup

The first task of any Serpent application is to initialize the system. Serpent initialization establishes communication between the application and the dialogue. The final application task is to clean up the Serpent system environment before exiting. The code segment from the spider application shown in Example 3-11 illustrates the basic operations necessary for Serpent initialization and cleanup.

```
with Serpent;
with S_Types; use S_types;

begin
  Serpent.Serpent_Init(MAIL_BOX, ILL_FILE);
  Serpent.Serpent_Cleanup;
end
```

**Example 3-11** Serpent Initialization

#### Specification Steps:

1. **Include Serpent package.** The `Serpent` and `S_Types` packages contain the external definition for the Serpent interface.
2. **Initialize Serpent.** The `serpent_init` procedure is used to initialize Serpent. It takes as parameters the `MAIL_BOX` and `ILL_FILE` constants generated by the Saddle processor. This procedure establishes communication between the application and the dialogue manager.

3. *Clean up.* The `serpent_cleanup` routine must be invoked before exiting the application. It is important to complete this step to release allocated system resources.



## 4 Modifying Information

The application can add, change, or remove information to and from the shared database using the transaction mechanism described in the introductory chapter of this document. Together, these are considered modifications to the shared database. The collection of application data in the shared database is known as the *view*. This is the information that is available to the dialogue writer to be presented to the end user. The view can be modified by either the application or the dialogue.

### 4.1 Sending Transactions

Before information can be modified in the shared database, it is necessary to start a transaction. All modifications to the shared database must be performed as part of a transaction.

It is possible to have multiple transactions open at one time. Each transaction has a unique transaction handle. Every operation performed on or to a transaction must specify this transaction handle.

The actual change to the shared database does not occur until the transaction is committed. Up to this point it is also possible to roll back the transaction so that none of the changes to shared data occur.

The code segment from the spider application in Example 4-1 shows the operations necessary for sending transactions. Code and comments directly related to the task are emphasized in bold type.

```
begin
  transaction : S_Types.Transaction_Type; --transaction handle

  Serpent.Serpent_Init (MAIL_BOX, ILL_FILE);
  transaction := Serpent.Start_Transaction;
  Serpent.Commit_Transaction(transaction);
  Serpent.Serpent_Cleanup;
end
```

**Example 4-1 Sending Transactions**

#### Specification Steps:

1. Declare *transaction variable*. A local variable of `transaction_type` can be used to maintain a transaction handle.

2. **Start a transaction.** The `start_transaction` function returns a transaction handle that must be passed to any subsequent commands operating on the transaction.
3. **Commit the transaction.** The actual change to shared data does not occur until the transaction is committed. Up to this point it is also possible to roll back the transaction using the `rollback_transaction` routine so that none of the changes to shared data occur.

## 4.2 Adding Static Information

This section makes some simplifying assumptions about the application that may in fact hold true for simple programs. The primary assumption is that the application will create only a fixed number of shared data instances so that the IDs of these instances can be maintained in local variables. A secondary assumption is that the application will create no more than one instance of each shared data element.

At any given moment, there can be up to three different versions of any given shared data instance. First, there is a local copy in the application. Second, there can be a copy that is part of an open transaction. Third, there is a copy in the shared database. Depending upon whether the shared data instance has been last modified by the application or by the end-user, the more current copy could be either the local application or shared database copy. A shared data instance that is part of an open transaction is the delta from the more current to less current copy of the shared data instance. The shared data copy being affected by any given operation should be apparent from the context.

Variables of generated shared data types are referred to as shared data variables. The first step in adding information to shared data is to assign values to these shared data variables. The method for doing this is based on the Serpent types of the components and is explained in detail in Section 3.2. These variables can then be used to initialize a record instance, either a component at a time or the entire record at once.

Once a transaction has been started, you can begin to add, change or remove information to/from the shared database as part of this transaction. These changes are made as part of the transaction and are not applied to the shared database until the transaction is committed.



The code segment from the spider application in Example 4-2 illustrates the operations involved in adding information to the shared database. Code and comments directly related to the task are emphasized in bold type.

```

with Serpent;           -- serpent interface definition
with S_Types; use S_Types;
with SpiderA           -- application data structures
GREEN_STATUS: constant := 0;
YELLOW_STATUS: constant := 1;
RED_STATUS: constant := 2;

begin
  transaction : S_Types.Transaction_Type; -- transaction handle
  cmc: SpiderA.cc_sdd           -- shared data variables
  gsl: SpiderA.sensor_sdd      -- shared data variables
  cmc_id,gsl_id: id_type       -- object instances

  Serpent.Serpent_Init (MAIL_BOX, ILL_FILE);
  --
  -- Initialize shared data variables.
  --
  cmc.name := "CMC" & ASCII.NUL;
  cmc.status := GREEN_STATUS;
  gsl.status := RED_STATUS;
  --
  -- Start a transaction to be sent to the dialogue.
  --
  transaction := Serpent.Start_Transaction;
  --
  -- Create an instance of the correlation center shared data
  -- record in the transaction and initialize using the shared
  -- data variable.
  --
  cmc_id := Serpent.Serpent.Add_Shared_Data(
    transaction, "correlation_center", "", cmc'address
  );
  --
  -- Create an instance of the sensor shared data record but
  -- this time update only the name component.
  --
  gsl_id := Serpent.Add_Shared_Data(
    transaction, "sensor", "name", gsl.name'address
  );

  Serpent.Commit_Transaction(transaction);

  Serpent.Serpent_Cleanup;
end;
```

#### Example 4-2 Adding Information to the Shared Database

### Specification Steps:

1. *With Saddle generated header file.* This file (spiderA.h in the example) defines the structure of the shared data. The packages Serpent and S\_Types must be specified before spiderA.h because SpiderA uses types defined in S\_Types..

2. **Define constants.** The spider example contains three constants: GREEN\_STATUS, YELLOW\_STATUS, and RED\_STATUS. These constants are not required but help increase the clarity of the example.
3. **Define shared data variables.** Variables `cmc` and `gs1` are both instances of generated shared data structures. These variables are used to initialize instances of shared data in the shared database.

The variables `cmc_id` and `gs1_id` are used to store the ids of the created shared data instances. These variables are declared to be of `id_type`. The ids are necessary to perform further operations on these instances in the shared database.

4. **Assign values to shared data variables.** The mechanism for accomplishing this task depends on the component types. This is explained in detail in Section 3.2.
5. **Add information to the shared database.** The `add_shared_data` routine creates a shared data instance as part of the specified transaction and returns the ID of the instance. The routine allows you to initialize a single component of the instance by specifying the name of the component and providing a *pointer* to the initial value. Any uninitialized fields of the instance are left undefined. It is also possible to initialize the entire instance by providing a pointer to the structure and specifying "" for the component name.

## 4.3 Modifying Information

Shared data instances in transactions or in the shared database can be modified using the `put_shared_data` procedure. This procedure takes as a parameter the ID of the shared data instance.

It is possible to modify any single component of a shared data record instance, or the entire record. Unmodified components in the transaction are marked as unchanged and maintain their current values. This is different from components that are explicitly set to undefined, which is actually a value.

The code segment from the spider application in Example 4-3 illustrates the operations involved in adding dynamic information to the shared database. Code and comments directly related to the task are emphasized in bold type.

```
with Serpent;           -- serpent interface definition
with S_Types; use S_Types;

begin
  transaction :S_Types.Transaction_Type; transaction handle
  gs1: SpiderA.sensor_sdd      -- shared data variables
```

```

cmc_id,gsl_id: id_type          -- object instances

Serpent.Serpent_Init(MAIL_BOX,ILL_FILE);
transaction := Serpent.Start_Transaction;
--
-- Update the name component of the sensor using a
-- string constant.
--
Serpent.Put_Shared_Data(
    transaction, gsl_id, "sensor", "status", "GSI" address
);
Serpent.Commit_Transaction(transaction);
Serpent.Serpent_Cleanup;
end;

```

### Example 4-3 Modifying Information in the Shared Database

## Specification Task

*Modifying information in the shared database.* The `put_shared_data` routine modifies the values of shared data instances that have already been created and are part of a transaction. This routine works in an identical manner to the `add_shared_data` call except that it takes an extra parameter, the ID of the shared data instance to be modified. The `put_shared_data` routine in Example 4-4 is used to assign a value (a string) to the name component of the first shared data instance.

## 4.4 Removing Information

Shared data instances in transactions or in the shared database can be removed using the `remove_shared_data` procedure. It is not possible to remove components of shared data record instances.

The code segment from the spider application in Example 4-4 illustrates the operations involved in removing information from the shared database. Code and comments directly related to the task are emphasized in bold type.

```

with Serpent;          -- serpent interface definition
with S_Types; use S_Types;

begin
    transaction :S_Types.Transaction_Type; transaction handle
    gsl: SpiderA.sensor_sdd      -- shared data variables
    cmc_id,gsl_id: id_type      -- object instances

    Serpent.Serpent_Init(MAIL_BOX,ILL_FILE);
    transaction := Serpent.Start_Transaction;
    --
    -- Update the name component of the sensor using a
    -- string constant.
    --
    Serpent.Remove_Shared_Data(transaction, "sensor_sdd",

```

## Modifying Information

```
gs1_id);  
  Serpent.Commit_Transaction(transaction);  
  Serpent.Serpent_Cleanup;  
end;
```

### Example 4-4 Removing Information from the Shared Database

## Specification Task

***Removing information from the shared database.*** The `remove_shared_data` procedure is used to remove a shared data instance from either the transaction or the shared database. The procedure takes a transaction handle, the element name, and the ID of the shared data instance to be deleted as parameters.

## 5 Retrieving Information

Serpent implements an *active database model* from the perspective of the application interface. This means that changes to application data resulting from end-user interactions with the system are automatically communicated back to the application, using the same transaction mechanism described in Section 4.3.

Transactions from the dialogue to the application consist of a list of changed shared data instances. The following assumptions are true about incoming transactions:

- Incoming transactions are guaranteed to have at least one changed shared data instance since empty transactions are automatically discarded by the interface.
- Changed shared data elements appear in random order in the transaction.
- Transactions remain unmodified in memory until the transaction is purged. This allows the application developer, for example, to reexamine changed instances.

### 5.1 Retrieving Transactions

The code segment from the spider application shown in Example 5-3 illustrates the basic operations of retrieving information from the shared database.

#### Specification Steps:

1. ***Get the transaction.*** The Serpent interface provides both synchronous and asynchronous calls for getting information from the shared database. The `get_transaction` routine waits until a transaction is available and then returns a handle for this transaction. The `get_transaction_no_wait` routine returns `not_available` when no transaction is available.
2. ***Get each changed shared data instance.*** The `get_first_changed_element` routine returns the first changed shared data element instance in the transaction and marks it as the *current* element. The `get_next_changed_element` routine returns the element directly following the current element and marks it as current. The `null_id` is returned if there is no next element instance on the list.
3. ***Purge the transaction.*** Once the transaction has been fully processed, it should be purged from the system. This frees system resources that could otherwise run out.

Code and comments directly related to the task are emphasized in bold type.

```
Serpent.Serpent_Init (MAIL_BOX, ILL_FILE) ;
:
```

```

--
-- Retrieve information from shared database.
--
done := false;
while not done loop
--
-- get next transaction. If there is none, the process
-- is blocked until one arrives.
--
transaction := Serpent.Get_Transaction;

id := Serpent.Get_First_Changed_Element(transaction);
--
-- Get each changed instance in the transaction.
--
while id /= null_id loop
    id := Serpent.Get_Next_Changed_Element(transaction);
end loop;

Serpent.Purge_Transaction(transaction);

end loop;

```

#### Example 5-1 Transaction Processing

## 5.2 Incorporating Changes

Changed element instances from the dialogue need to be processed for any changes in the application domain to be affected. The *Serpent* application interface provides several routines for the purpose of processing changed shared data elements.

This section makes some simplifying assumptions about the application that may in fact hold true for simple programs. The primary assumption is that the application has created only a fixed number of shared data instances so that the IDs of these instances can be maintained as static, local variables. A secondary assumption is that the application has created no more than one instance of each shared data record.

The code segment from the spider application in Example 5-2 illustrates the operations involved in incorporating changes to shared data elements in static, local variables. Code and comments directly related to the task are emphasized in bold type.

```

--
-- Get each changed record instance in the transaction.
--
while id /= null_id loop
    element_name := Serpent.Get_Element_Name(transaction, id);
--
-- If the record is a correlation center then this must
-- be the cmc shared data variable.
--

```

```

        if element name = "cc_sdd" then
            Serpent.Incorporate_Changes(
                transaction, id, cmc'address);
        --
        -- Otherwise, this must be the gsl variable.
        --
        else
            Serpent.Incorporate_Changes(
                transaction, id, gsl'address);
        end if;

        id := Serpent.Get_Next_Changed_Element(transaction);

    end loop;

```

### Example 5-2 Processing Changes to Shared Data Records (Simple Programs)

#### Specification Steps:

1. **Get the element name.** This is a simple call that returns a pointer to the element name. For simple programs that have no more than one instance of a particular shared data record, the element name can be used to identify the shared data instance. In larger, more complex systems it is often useful in determining a class of shared data instances.
2. **Update local database.** Shared data variables can be updated using the `incorporate_changes` routine. This routine directly incorporates changes in the shared data instance into the local variable. Components of the shared data record that have not been changed are left untouched. By continually incorporating changes into the initial shared data variable, the application developer is guaranteed that application data remains consistent with user input.
3. **Update the local database based on the change type.** The exact type of processing required to update the local database is based primarily on the change type. If this is a new shared data element (e.g., the change type is `create`) the `get_shared_data` function can be used to create a copy of the record instance. If the change type is `modify`, the local shared data instance can be obtained from the hash table. The `incorporate_changes` routine can then be used to update the contents of this instance with changed component values.

## 5.3 Examining Changes by Component

The Serpent application programmer's interface provides routines that allow the application developer to examine each changed component in a changed record individually.

The operations are illustrated in Example 5-3, taken from the spider chart example. Code and comments directly related to the task are emphasized in bold type.

```

:
  id := Serpent.Get_First_Changed_Element(transaction);
--
-- Get each changed record instance recording the transaction.
--
  while id /= null_id loop

    Serpent.Get_Element_Name(transaction,id,element_name);
    changed_components :=
      Serpent.create_changed_component_list(
        transaction,id
      );

    component_node :=
      Serpent.Get_First_Node(changed_components);

    while component_node /= null_id loop

      Serpent.Get_Component_Name(
        component_node, component_name);

      type := Serpent.Get_Shared_Data_Type(
        element_name, component_name);

      if type = serpent_id then
        id_data := Serpent.Get_Shared_Data_id(
          transaction, id, component_name);
      end if;

      component_node :=
        Serpent.Get_Next_Node(changed_components,
          component_node);

    end loop;                -- end loop through list

    id := Serpent.Get_Next_Changed_Element(transaction);
  end loop;
:

```

### Example 5-3 Processing Changes to Shared Data Records (Large Systems)

#### Specification Steps:

1. **Get the list of changed components.** A list of changed components can be obtained by using the `create_changed_component_list` function.
2. **Loop through the list.** The `get_first_node` and `get_next_node` routines provide a mechanism to sequence the changed components. `Get_component_name` provides a mechanism to get the name from the node.



3. *Examine the type and/or data.* The Serpent application programmer's interface provides routines to examine both the type and the data at the component level. The `get_shared_data_type` returns a `serpent_data_type`. The `get_shared_data_id` routines return the component value.



## 6 Finishing the Application

Other than sending and retrieving data, the application can determine errors from the use of Serpent, record communication between the application and Serpent and exit according to a signal received from the dialogue.

### 6.1 Error Checking

Each routine in Serpent sets status on exit. It is good software engineering practice to check status after every call to make sure that the routine has executed correctly, and provide appropriate recovery actions if it has not. Example 6-1 illustrates the routines provided by Serpent for examining the status.

```
transaction := Serpent.start_transaction;
if Serpent.get_status /= 0 then
  Serpent.print_status("error during start_transaction");
  Serpent.serpent_cleanup;
end if;
```

#### Example 6-1 Examining Status

The first of these routines is `get_status`, which returns an enumeration of status codes. Valid statuses returned by each routine in Serpent are defined in Appendix B. Successful execution (or "OK") is always set to zero; hence, it is possible to make a simple boolean comparison for bad status.

The `print_status` routine prints a user-defined error message and the current status.

### 6.2 Recording Transactions

Transactions between the application and the dialogue can be recorded using the `start_recording` and `stop_recording` procedures available in the Serpent application programmers interface. After the call to `start_recording` is made, transactions may be sent across the interface. Any number of transactions containing any type or amount of data can be sent. Once `start_recording` has been called, all transactions and associated data will be written to the specified file until the `stop_recording` routine is invoked.

Transactions can be examined using the `format` command described in Section 7.1. This is useful in debugging since it allows the examination of information flow across the interface. Transactions can also be played back to simulate either application or dialogue functionality using the `playback` command described in Section 7.2.

Before testing the application or the dialogue, first record the transactions to be used in testing. Example 6-2 illustrates the basic operations for recording transactions.

```
--
-- Start recording.
--
Serpent.start_recording("recording", "test data: 5.7.3");
--
-- Send test data.
--
transaction := Serpent.start_transaction;
:
Serpent.commit_transaction(transaction);

transaction := Serpent.start_transaction;
:
Serpent.commit_transaction(transaction);

transaction := Serpent.start_transaction;
:
Serpent.commit_transaction(transaction);

--
-- Stop recording.
--
Serpent.stop_recording;
```

### Example 6-2 Recording Transactions

#### Specification Steps:

1. **Start recording.** The `start_recording` routine takes as parameters both the name of the file in which to save the recording and a message to help identify the recording.
2. **Send transactions.** After the call to `start_recording` is made, transactions may be sent across the interface.
3. **Stop recording.** The `stop_recording` function closes the current recording file.

## 6.3 Dialogue Initiated Exit

The dialogue can terminate at any time using the `exit` command available to the dialogue specifier. The `exit` command sends a SIGINT signal to the application. This signal will cause the application to exit immediately, unless a signal handler has been registered with the operating system.

The signal handler describes the steps to be taken when the dialogue initiates an exit. Typically, this involves saving data structures out to permanent storage and exiting the system.

The steps necessary to accomplish this are compiler-dependent.



# 7 Testing and Debugging

The recording capability discussed in Chapter 3 provides a mechanism to assist in testing and debugging.

## 7.1 Formatting Recordings

Application recordings are saved in a binary format file. The `format` command distributed with Serpent converts this file into a formatted, easy-to-read report. The information in the file can be useful in isolating problems to either the application or the dialogue.

```
% format recording
FORMATTING JOURNAL FILE: recording

HEADER:
  dialogue name:
  message: no comment at this time
OWNER:
  ill file name: se.ill
  mailbox name: SE_BOX

PARTICIPANT:
  ill file name: se.ill
  mailbox name: DM_BOX

TRANSACTION:
  Fri Jan 25 15:17:13:800 1991
  Sender: SE_BOX
  Receiver: DM_BOX
  Element name: dialogue_sdd Change type: create ID: 955
    shared_data      buffer      UNDEFINED_BUFFER
    termination      buffer      UNDEFINED_BUFFER
    macros            buffer      UNDEFINED_BUFFER
    externs           buffer      UNDEFINED_BUFFER
    initialization    buffer      UNDEFINED_BUFFER
    count            integer     0
    name              string      UNDEFINED_STRING
    prologue          buffer      UNDEFINED_BUFFER

%
```

**Example 7-1 Formatting the Recording File**

## 7.2 Playback

Once you have made a recording, it is possible play back the recording to simulate one or more of the Serpent processes. To simulate the spider application, for example, you would run the `playback` command provided with Serpent specifying the name of the recording file and the mailbox of the process to be simulated, as illustrated in Example 7-2.

```
% app-test recording SPIDERA_BOX
Playing back journal file: recording
Message: regression test data, 5.7.3
Playback completed successfully
% _
```

**Example 7-2 Testing the Application**



# Appendix A Data Structures

This appendix presents in alphabetical order the type and constant definitions that are used in the Ada language interface to the Serpent system. The following is a list and short description of each of these types and constants. A more complete description immediately follows:

Type/Constant	Description
<code>sd_buffer</code>	used to define the structure of a shared data buffer
<code>change_type</code>	defines the type of modification made for an element
<code>id_type</code>	used to uniquely identify shared data elements
<code>null_id</code>	defines the null value for the <code>id_type</code>
<code>shared_data_types</code>	defines the Serpent data types
<code>transaction_type</code>	used to define transaction handles



## TYPE

---

---

**buffer**

---

---

---

Description	The <code>buffer</code> type allows the communication of $n$ bytes of application data along with an indication of the type. <code>Buffer</code> is the only dynamic shared data type in that neither the size nor the type of the information is predefined. Buffers can be used to: share untyped, contiguous data; share large amounts of contiguous data (i.e., large strings); provide variant records.
-------------	--

---

## Definition

```
type buffer is record
  type: shared_data_types
  length: integer;
  body: system.address;
```

---

Components	length	Size in bytes of the data. This field is required even if the data is of a well known type (i.e., integer).
	body	A pointer to the actual data. The space used to maintain this data is not part of the buffer structure and must be managed by the user.
	type	The type of information stored in the buffer. This field is also required.

---

## TYPE

---

---

**change\_type**

---

---

---

Description	The change_type defines the type of modification made for an element.
-------------	---

---

---

Definition	<pre>for change_type use (     no_change =&gt; -1,     create   =&gt; 0,     modify   =&gt; 1,     remove   =&gt; 2,     get      =&gt; 3 ) ;</pre>
------------	---

---

---

Components	no_change	Not changed or invalid change.
	remove	Existing shared data instance removed.
	create	New shared data instance created.
	modify	Existing shared data instance modified.
	remove	Existing shared data instance removed.

---

## TYPE

---

---

**id\_type**

---

---

---

Description

The `id_type` is used to uniquely identify shared data elements.

---

Definition

`type id_type is new int;`

null\_id

## CONSTANT

---

---

# null\_id

---

---

---

Description	The null_id constant defines the null value for the id_type. This constant can be used to test for null ID values.
-------------	--

---

---

Definition	constant id_type := -1;
------------	-------------------------

---

## TYPE

---

---

## shared\_data\_types

---

---

---

Description	The <code>shared_data_type</code> type is an enumeration of defined Serpent data types.
-------------	---

---

---

Definition	<pre>for shared_data_types use (   sd_boolean =&gt; 0,   sd_integer =&gt; 1,   sd_real =&gt; 2,   sd_string =&gt; 3,   sd_record =&gt; 4,   sd_id =&gt; 5,   sd_buffer =6,   sd_undefined =7   sd_no_data_type =8 ) ;</pre>
------------	---

---

transaction\_type

TYPE

---

---

## transaction\_type

---

---

---

Description

Variables of transaction\_type are used to define transactions.



# Appendix B Routines

This appendix presents in alphabetical order the functions and procedures that make up the C language interface to Serpent. These routines can be categorized as follows:

## Initialization/Cleanup

- `serpent_init`
- `serpent_cleanup`

## Transaction Processing

- `start_transaction`
- `commit_transaction`
- `rollback_transaction`
- `get_transaction`
- `get_transaction_no_wait`
- `purge_transaction`

## Sending and Retrieving Data

- `add_shared_data`
- `put_shared_data`
- `remove_shared_data`
- `get_first_changed_element`
- `get_next_changed_element`
- `get_shared_data`
- `get_shared_data_buffer`
- `get_shared_data_boolean`
- `get_shared_data_id`
- `get_shared_data_integer`
- `get_shared_data_real`
- `get_shared_data_string`
- `get_first_node`
- `get_next_node`
- `incorporate_changes`
- `create_changed_component_list`
- `get_change_type`
- `get_element_name`
- `get_shared_data_type`

### **Undefined Values**

- set\_undefined
- is\_undefined

### **Record/Playback**

- start\_recording
- stop\_recording

### **Checking Status**

- get\_status
- print\_status

## FUNCTION

---

---

**add\_shared\_data**

---

---

Description	The <code>add_shared_data</code> routine creates an instance for the specified shared data element and returns a unique ID. The shared data instance may or may not be initialized.
-------------	---

Syntax	<pre> function add_shared_data (     transaction : in transaction_type;     element_name : in string;     component_name : in string ;     data : in system.address ) return id_type; </pre>
--------	--

Parameters	<table border="0"> <tr> <td style="padding-right: 20px;"><code>transaction</code></td> <td>The transaction for which this operation is defined.</td> </tr> <tr> <td><code>element_name</code></td> <td>The name of the shared data element.</td> </tr> <tr> <td><code>component_name</code></td> <td>The name of a specific component to be initialized with the data, or "" if the data corresponds to the entire element.</td> </tr> <tr> <td><code>data</code></td> <td>data or null pointer if non-initialized.</td> </tr> </table>	<code>transaction</code>	The transaction for which this operation is defined.	<code>element_name</code>	The name of the shared data element.	<code>component_name</code>	The name of a specific component to be initialized with the data, or "" if the data corresponds to the entire element.	<code>data</code>	data or null pointer if non-initialized.
<code>transaction</code>	The transaction for which this operation is defined.								
<code>element_name</code>	The name of the shared data element.								
<code>component_name</code>	The name of a specific component to be initialized with the data, or "" if the data corresponds to the entire element.								
<code>data</code>	data or null pointer if non-initialized.								

Returns	The ID of the newly created shared data instance.
---------	---

Status	<code>ok</code> , <code>out_of_memory</code> , <code>null_element_name</code> , <code>overflow</code>
--------	---

## ROUTINE

---

---

# commit\_transaction

---

---

---

Description	The commit_transaction procedure is used to commit a transaction to the shared database.
-------------	--

---

Syntax	<pre>procedure commit_transaction(     transaction: in transaction_type );</pre>
--------	--

---

Parameters	transaction	Existing transaction ID.
------------	-------------	--------------------------

---

Status	ok, out_of_memory, invalid_transaction_handle
--------	---

## FUNCTION

---

---

**create\_changed\_component\_list**

---

---

Description	The create_changed_component_list function accepts a transaction, an instance ID as a parameter and creates a list of changed component names. This component list is managed using the get_first_node and get_next_node routines.	
Syntax	<pre>function create_changed_component_list (     transaction : in transaction_type;     id : in id_type     ) return LIST;</pre>	
Parameters	transaction	The transaction for which this operation is defined.
	id	Existing data instance ID.
Returns	The list of changed component names associated with a data instance, or NULL if none.	
Status	ok, invalid_id, out_of_memory, element_not_a_record	

get\_change\_type

## FUNCTION

---

---

# get\_change\_type

---

---

Description	The <code>get_change_type</code> function accepts a transaction and an instance ID as parameters and returns the associated change type.	
Syntax	<pre>function get_change_type(     transaction : in transaction_type;     id : in id_type ) return change_type;</pre>	
Parameters	transaction	The transaction for which this operation is defined.
	id	Existing shared data ID.
Returns	Change type associated with the shared data instance ID.	
Status	<code>ok</code> , <code>invalid_change_type</code> , <code>invalid_transaction_handle</code> , <code>invalid_id</code>	

## FUNCTION

---

---

**get\_component\_name**

---

---

Description	The get_component_name procedure accepts a NODE from get_first_node or get_next_node and returns the component name.	
Syntax	<pre>function get_component_name (     component_node : in node;     component_name : out string );</pre>	
Parameters	component_node	The node that describes a component.
	component_name	The component name.
Status	ok, invalid_change_type, invalid_transaction_handle, invalid_id	

## FUNCTION

---

---

**get\_element\_name**

---

---

---

Description	The get_element_name procedure accepts a transaction and an instance ID as parameters and returns the associated element name.
-------------	--

---

---

Syntax	<pre>procedure get_element_name (     transaction : in transaction_type;     id : in id_type ;     ada_element_name : out string );</pre>
--------	---

---

---

Parameters	transaction	The transaction for which this operation is defined.
	id	Existing shared data instance.
	ada_element_name	The string that contains the element name.

---

---

Status	ok, invalid_id
--------	----------------

---



## FUNCTION

---

---

**get\_first\_changed\_element**

---

---

Description	The <code>get_first_changed_element</code> function is used to get the ID of the first changed element in a transaction.	
Syntax	<pre>function get_first_changed_element (     transaction : in transaction_type ) return id_type;</pre>	
Parameters	<code>transaction</code>	Existing transaction ID.
Returns	The handle of the first changed element.	
Status	<code>ok</code> , <code>invalid_transaction_handle</code> , <code>out_of_memory</code>	

get\_first\_node

## FUNCTION

---

---

# get\_first\_node

---

---

---

Description	The <code>get_first_node</code> function is used to navigate through the list returned by <code>create_changed_component_list</code> .
-------------	--

---

Syntax	<pre>function get_first_node(     list_arg : in LIST ) return NODE;</pre>
--------	---

---

---

Parameters	<table><tr><td><code>list_arg</code></td><td>List returned by <code>create_changed_component_list</code>.</td></tr></table>	<code>list_arg</code>	List returned by <code>create_changed_component_list</code> .
<code>list_arg</code>	List returned by <code>create_changed_component_list</code> .		

---

---

Returns	The name of the first changed component.
---------	--

---

---

Status	<code>ok</code> , <code>invalid_transaction_handle</code> , <code>out_of_memory</code> .
--------	--

---

## FUNCTION

---

---

**get\_next\_changed\_element**

---

---

Description	The <code>get_next_changed_element</code> function is used to get the ID of the next changed element on a transaction list or return <code>null_id</code> if the transaction list is empty.	
Syntax	<pre>function get_next_changed_element (     transaction_type : in transaction ) returns id_type;</pre>	
Parameters	<code>transaction</code>	Existing transaction ID.
Returns	The handle of the next changed element.	
Status	<code>ok</code> , <code>invalid_transaction_handle</code> , <code>out_of_memory</code>	

get\_next\_node

## FUNCTION

---

---

# get\_next\_node

---

---

Description	The <code>get_next_node</code> function is used to navigate through the list returned by <code>create_changed_component_list</code> .	
Syntax	<pre>function get_first_node(     list_arg : in LIST;     node_arg : in NODE ) return NODE;</pre>	
Parameters	<code>list_arg</code>	List returned by <code>create_changed_component_list</code> .
	<code>node_arg</code>	Current node in the list.
Returns	The node of the next element in the list.	
Status	<code>ok</code> , <code>invalid_transaction_handle</code> , <code>out_of_memory</code> .	

## FUNCTION

---



---

## get\_shared\_data

---



---

Description	The <code>get_shared_data</code> function allocates process memory, copies shared data into process memory, and returns a pointer to the data. It can be used to retrieve either a whole shared data record or individual components of shared data records.
-------------	--

**Warning:** Record components may not have been specified and, therefore, would not contain valid data.

Syntax	<pre>function get_shared_data (     transaction : in transaction_type; /     id : in id_type;     component_name : in string ) return system.address;</pre>
--------	---

Parameters	<table border="0"> <tr> <td style="padding-right: 20px;"><code>transaction</code></td> <td>Transaction in which to find the shared data ID.</td> </tr> <tr> <td><code>id</code></td> <td>Existing shared data ID.</td> </tr> <tr> <td><code>component_name</code></td> <td>Name of component for which to retrieve data, or entire element if "".</td> </tr> </table>	<code>transaction</code>	Transaction in which to find the shared data ID.	<code>id</code>	Existing shared data ID.	<code>component_name</code>	Name of component for which to retrieve data, or entire element if "".
<code>transaction</code>	Transaction in which to find the shared data ID.						
<code>id</code>	Existing shared data ID.						
<code>component_name</code>	Name of component for which to retrieve data, or entire element if "".						

Returns	A pointer to changed data.
---------	----------------------------

Status	<code>ok</code> , <code>invalid_id</code> , <code>out_of_memory</code> , <code>incomplete_record</code>
--------	---

get\_shared\_data\_boolean

## PROCEDURE

---

---

# get\_shared\_data\_boolean

---

---

---

Description	The get_shared_data_boolean procedure copies shared data into process memory.
-------------	---

---

---

Syntax	<pre>procedure get_shared_data_boolean(     transaction : in transaction_type;     id : in id_type;     component_name : in string;     value : out boolean );</pre>
--------	--

---

---

Parameters	<table><tr><td>transaction</td><td>Transaction in which to find the shared data ID.</td></tr><tr><td>id</td><td>Existing shared data ID.</td></tr><tr><td>component_name</td><td>Name of component for which to retrieve data. Component must be of type boolean.</td></tr><tr><td>value</td><td>The value of the specified component.</td></tr></table>	transaction	Transaction in which to find the shared data ID.	id	Existing shared data ID.	component_name	Name of component for which to retrieve data. Component must be of type boolean.	value	The value of the specified component.
transaction	Transaction in which to find the shared data ID.								
id	Existing shared data ID.								
component_name	Name of component for which to retrieve data. Component must be of type boolean.								
value	The value of the specified component.								

---

---

Status	ok, invalid_id, out_of_memory, incomplete_record
--------	--

---

## PROCEDURE

---



---

## get\_shared\_data\_buffer

---



---



---

Description	The get_shared_data_buffer procedure copies shared d into process memory.
-------------	---

---



---

Syntax	<pre> procedure get_shared_data_buffer(   transaction : in transaction_type;   id : in id_type;   component_name : in string;   value : out buffer ) ; </pre>
--------	---

---



---

Parameters	<table> <tr> <td>transaction</td> <td>Transaction in which to find the shared data ID.</td> </tr> <tr> <td>id</td> <td>Existing shared data ID.</td> </tr> <tr> <td>component_name</td> <td>Name of component for which to retrieve data. Component must be of type buffer.</td> </tr> <tr> <td>value</td> <td>The value of the specified component.</td> </tr> </table>	transaction	Transaction in which to find the shared data ID.	id	Existing shared data ID.	component_name	Name of component for which to retrieve data. Component must be of type buffer.	value	The value of the specified component.
transaction	Transaction in which to find the shared data ID.								
id	Existing shared data ID.								
component_name	Name of component for which to retrieve data. Component must be of type buffer.								
value	The value of the specified component.								

---



---

Status	ok, invalid_id, out_of_memory, incomplete_record
--------	--

---

## PROCEDURE

---

---

# get\_shared\_data\_id

---

---

---

Description	The <code>get_shared_data_id</code> procedure copies shared data into process memory.
-------------	---

---

---

Syntax	<pre>procedure get_shared_data_id(     transaction : in transaction_type;     id : in id_type;     component_name : in string;     value : out id ) ;</pre>
--------	---

---

---

Parameters	<table><tr><td>transaction</td><td>Transaction in which to find the shared data ID.</td></tr><tr><td>id</td><td>Existing shared data ID.</td></tr><tr><td>component_name</td><td>Name of component for which to retrieve data. Component must be of type <code>id</code>.</td></tr><tr><td>value</td><td>The value of the specified component.</td></tr></table>	transaction	Transaction in which to find the shared data ID.	id	Existing shared data ID.	component_name	Name of component for which to retrieve data. Component must be of type <code>id</code> .	value	The value of the specified component.
transaction	Transaction in which to find the shared data ID.								
id	Existing shared data ID.								
component_name	Name of component for which to retrieve data. Component must be of type <code>id</code> .								
value	The value of the specified component.								

---

---

Status	<code>ok</code> , <code>invalid_id</code> , <code>out_of_memory</code> , <code>incomplete_record</code>
--------	---

---



## PROCEDURE

---

---

**get\_shared\_data\_integer**

---

---

---

Description	The <code>get_shared_data_integer</code> procedure copies shared data into process memory.
-------------	--

---

---

Syntax	<pre>procedure get_shared_data_integer(     transaction : in transaction_type;     id : in id_type;     component_name : in string;     value : out integer );</pre>
--------	--

---

---

Parameters	<table><tr><td>transaction</td><td>Transaction in which to find the shared data ID.</td></tr><tr><td>id</td><td>Existing shared data ID.</td></tr><tr><td>component_name</td><td>Name of component for which to retrieve data. Component must be of type integer.</td></tr><tr><td>value</td><td>The value of the specified component.</td></tr></table>	transaction	Transaction in which to find the shared data ID.	id	Existing shared data ID.	component_name	Name of component for which to retrieve data. Component must be of type integer.	value	The value of the specified component.
transaction	Transaction in which to find the shared data ID.								
id	Existing shared data ID.								
component_name	Name of component for which to retrieve data. Component must be of type integer.								
value	The value of the specified component.								

---

---

Status	<code>ok</code> , <code>invalid_id</code> , <code>out_of_memory</code> , <code>incomplete_record</code>
--------	---

---

## PROCEDURE

---

---

# get\_shared\_data\_real

---

---

---

Description	The <code>get_shared_data_real</code> procedure copies shared data into process memory.
-------------	---

---

---

Syntax	<pre>procedure get_shared_data_real(     transaction : in transaction_type;     id : in id_type;     component_name : in string;     value : out real ) ;</pre>
--------	---

---

---

Parameters	<table><tr><td>transaction</td><td>Transaction in which to find the shared data ID.</td></tr><tr><td>id</td><td>Existing shared data ID.</td></tr><tr><td>component_name</td><td>Name of component for which to retrieve data. Component must be of type <code>real</code>.</td></tr><tr><td>value</td><td>The value of the specified component.</td></tr></table>	transaction	Transaction in which to find the shared data ID.	id	Existing shared data ID.	component_name	Name of component for which to retrieve data. Component must be of type <code>real</code> .	value	The value of the specified component.
transaction	Transaction in which to find the shared data ID.								
id	Existing shared data ID.								
component_name	Name of component for which to retrieve data. Component must be of type <code>real</code> .								
value	The value of the specified component.								

---

---

Status	<code>ok</code> , <code>invalid_id</code> , <code>out_of_memory</code> , <code>incomplete_record</code>
--------	---

---

## PROCEDURE

---

---

**get\_shared\_data\_string**

---

---

---

Description	The get_shared_data_string procedure copies shared data into process memory.
-------------	--

---

Syntax	<pre>procedure get_shared_data_string(     transaction : in transaction_type;     id : in id_type;     component_name : in string;     value : out string );</pre>
--------	--

---

Parameters	transaction	Transaction in which to find the shared data ID.
	id	Existing shared data ID.
	component_name	Name of component for which to retrieve data. Component must be of type string.
	value	The value of the specified component.

---

Status	ok, invalid_id, out_of_memory, incomplete_record
--------	--

## FUNCTION

---

---

# get\_shared\_data\_type

---

---

Description	The <code>get_shared_data_type</code> function is used to get the type associated with a shared data element.	
Syntax	<pre>function get_shared_data_type(     element_name: in string;     component_name: in string ) returns shared_data_type;</pre>	
Parameters	<code>element_name</code>	The name of the shared data element.
	<code>component_name</code>	The name of the shared data component, or NULL.
Returns	The type of the shared data element or record component.	
Status	<code>ok, null_element_name</code>	

## FUNCTION

---

---

**get\_status**

---

---

---

Description	The get_status function returns the current system status.
-------------	--

---

Syntax	<code>function get_status return status_codes;</code>
--------	---

---

Parameters	None.
------------	-------

---

Returns	The current status.
---------	---------------------

---

Status	None.
--------	-------

get\_transaction

## FUNCTION

---

---

# get\_transaction

---

---

Description	The <code>get_transaction</code> function is used to synchronously retrieve the ID for the next completed transaction.
Syntax	<code>function get_transaction return transaction_type;</code>
Parameters	None.
Returns	The transaction ID for a completed transaction.
Status	<code>ok, system_operation_failed</code>

## FUNCTION

---

---

**get\_transaction\_no\_wait**

---

---

Description	The <code>get_transaction</code> function is used to asynchronously retrieve the ID for the next completed transaction.
Syntax	<pre>function get_transaction_no_wait return transaction_type;</pre>
Parameters	None.
Returns	The transaction ID for a completed transaction.
Status	<code>ok</code> , <code>system_operation_failed</code> , <code>not_available</code>

## PROCEDURE

---

---

**incorporate\_changes**

---

---

Description	The <code>incorporate_changes</code> procedure is used to incorporate changes into local process memory without destroying unchanged information.	
Syntax	<pre>procedure incorporate_changes(     transaction : in transaction_type;     id : in id_type;     data : in system.address );</pre>	
Parameters	transaction	Existing transaction ID.
	id	Existing shared data ID.
	data	Pointer to the local data structure to be updated.
Status	ok, invalid_id	



## FUNCTION

---

---

**is\_undefined**

---

---

---

Description	The <code>is_undefined</code> function evaluates a data value of a specified type and determines if the value is undefined. The <code>is_undefined</code> function cannot be used with an entire shared data record at once.
-------------	--

---

Syntax	<pre>function is_undefined(     type : in serpent_data_type;     data : system.address ) return boolean;</pre>
--------	--

---

---

Parameters	<table><tr><td>type</td><td>The type of the shared data component.</td></tr><tr><td>data</td><td>Pointer to the value being examined.</td></tr></table>	type	The type of the shared data component.	data	Pointer to the value being examined.
type	The type of the shared data component.				
data	Pointer to the value being examined.				

---

---

Returns	True if data is undefined; false otherwise.
---------	---

---

---

Status	<code>ok</code> , <code>operation_undefined_type</code>
--------	---

---

`print_status`

## PROCEDURE

---

---

# `print_status`

---

---

---

Description	The <code>print_status</code> procedure prints out a user-defined error message and the current status.
-------------	---

---

Syntax	<pre>procedure print_status(     error_msg : in string );</pre>
--------	---

---

Parameters	<code>error_msg</code>	User-defined error message.
------------	------------------------	-----------------------------

---

Status	None.
--------	-------

## PROCEDURE

---

---

**purge\_transaction**

---

---

Description	The <code>purge_transaction</code> procedure is used to remove a received transaction once the contents of the transaction have been examined and acted upon.	
Syntax	<pre>procedure purge_transaction(     transaction : in transaction_type );</pre>	
Parameters	<code>transaction</code>	Existing transaction ID.
Status	<code>ok, invalid_id, illegal_receiver</code>	

## PROCEDURE

---



---

## put\_shared\_data

---



---

Description	The <code>put_shared_data</code> procedure is used to put information into shared data. Either a whole record is placed into shared data or an individual component. The use of "" as the component name indicates that the entire record is to be placed into shared data.
-------------	---

Syntax	<pre> procedure put_shared_data(   transaction : in transaction_type;   id : in id_type;   element_name : in string;   component_name : in string;   data : in system.address ); </pre>
--------	---

Parameters	<table border="0"> <tr> <td style="padding-right: 20px;">transaction</td> <td>The transaction to which the shared data should be put.</td> </tr> <tr> <td>id</td> <td>Shared data ID.</td> </tr> <tr> <td>element_name</td> <td>The name of the shared data element.</td> </tr> <tr> <td>component_name</td> <td>The name of the shared data component or "" if the whole element is to be moved to shared data.</td> </tr> <tr> <td>data</td> <td>Shared data.</td> </tr> </table>	transaction	The transaction to which the shared data should be put.	id	Shared data ID.	element_name	The name of the shared data element.	component_name	The name of the shared data component or "" if the whole element is to be moved to shared data.	data	Shared data.
transaction	The transaction to which the shared data should be put.										
id	Shared data ID.										
element_name	The name of the shared data element.										
component_name	The name of the shared data component or "" if the whole element is to be moved to shared data.										
data	Shared data.										

Status	ok, undefined_shared_data_type, null_element_name, invalid_id
--------	---

## PROCEDURE

---

---

**remove\_shared\_data**

---

---

Description	The <code>remove_shared_data</code> procedure is used to remove a specified shared data instance from the shared database.	
Syntax	<pre>procedure remove_shared_data(   transaction : in transaction_type;   element_name : in string;   id : in id_type );</pre>	
Parameters	<code>transaction</code>	Transaction from which to remove the shared data element.
	<code>element_name</code>	Name of element to be removed.
	<code>id</code>	Existing shared data ID.
Status	<code>ok</code> , <code>out_of_memory</code> , <code>null_element_name</code> , <code>invalid_id</code>	

## PROCEDURE

---

---

# rollback\_transaction

---

---

---

Description	The <code>rollback_transaction</code> procedure is used to abort a given transaction and to delete the associated transaction buffer.
-------------	---

---

---

Syntax	<pre>procedure rollback_transaction(     transaction : in transaction_type );</pre>
--------	---

---

---

Parameters	<table><tr><td>transaction</td><td>Existing transaction ID.</td></tr></table>	transaction	Existing transaction ID.
transaction	Existing transaction ID.		

---

---

Status	<code>ok</code> , <code>invalid_transaction_handle</code>
--------	---

---

## PROCEDURE

---

---

**serpent\_init**

---

---

Description	The <code>serpent_init</code> procedure performs necessary initialization of the interface layer.	
Syntax	<pre>procedure serpent_init(     mailbox : in string;     ill_file : in string );</pre>	
Parameters	<code>mailbox</code>	<code>MAIL_BOX</code> constant defined in Saddle-generated include file.
	<code>ill_file</code>	<code>ILL_FILE</code> constant defined in Saddle-generated include file.
Status	<code>ok</code> , <code>out_of_memory</code> , <code>null_mailbox_name</code> , <code>null_ill_file_name</code> , <code>system_operation_failed</code>	

`serpent_cleanup`

## PROCEDURE

---

---

# **`serpent_cleanup`**

---

---

---

Description	The <code>serpent_cleanup</code> procedure performs necessary cleanup of the interface layer.
-------------	---

---

---

Syntax	<code>procedure serpent_cleanup;</code>
--------	---

---

---

Parameters	None.
------------	-------

---

---

Status	ok
--------	----

---



## PROCEDURE

---

---

**set\_undefined**

---

---

Description	The set_undefined procedure sets the value of the data pointed to by value to undefined. The set_undefined procedure cannot be used with an entire shared data record at once.	
Syntax	<pre>procedure set_undefined(     type : in serpent_data_type;     data : in system.address );</pre>	
Parameters	type	The type of the shared data component.
	data	Pointer to the value being set to undefined.
Status	ok, operation_undefined_type	

## PROCEDURE

---

---

# start\_recording

---

---

Description	The start_recording procedure enables recording. Once start_recording has been called, all transactions and associated data will be saved out to the specified file until the stop_recording procedure is invoked.	
Syntax	<pre>procedure start_recording(     file_name : in string;     message : in string );</pre>	
Parameters	file_name	File to which to write recording.
	message	Recording description.
Status	ok, io_failure, already_recording	

## FUNCTION

---

---

**start\_transaction**

---

---

Description	The start_transaction function is used to define the start of a series of shared data modifications.
Syntax	<code>function start_transaction return transaction_type;</code>
Parameters	None.
Returns	A unique transaction ID.
Status	<code>ok, out_of_memory, overflow</code>

stop\_recording

## PROCEDURE

---

---

# stop\_recording

---

---

---

Description	The stop_recording procedure causes the current recording to be stopped.
-------------	--

---

---

Syntax	procedure stop_recording;
--------	---------------------------

---

---

Parameters	None.
------------	-------

---

---

Status	ok, io_failure, invalid_process_record
--------	--

---

# Appendix C    Commands for Testing Serpent Applications and Dialogues

This appendix contains definitions of commands provided with Serpent to assist in testing Serpent applications and dialogues. The following is a list and short description of each of these commands. A more complete description immediately follows:

Command	Description
<code>format</code>	converts a recording file into an easy-to-read report
<code>playback</code>	used to play back a recording file



## COMMAND

---

---

**format**

---

---

---

Description	The <code>format</code> command converts a binary Serpent transaction log to a formatted, easy-to-read report. The report is written to standards output.	
-------------	---	--

---

Definition	<code>format recfile</code>	
------------	-----------------------------	--

---

Parameters	<code>recfile</code>	The transaction log to be converted.
------------	----------------------	--------------------------------------

---

Returns	<code>0</code>	<code>ok</code>
---------	----------------	-----------------

## COMMAND

# playback

Description	The <code>playback</code> command can be used to reenact a session based on a recording file.	
Definition	<code>playback recfile host_mailbox correspondents</code>	
Parameters	<code>recfile</code>	The name of the file containing the recording to be played back.
	<code>host_mailbox</code>	The mailbox for the process to be simulated.
	<code>correspondents</code>	List of correspondents (the default is "all").
Returns	0	ok
	1	dialogue not found
	2	playback file not found
	3	error during playback



# Appendix D Spider Example

```

-- -----
-- Title:      Spider chart demo.
-- Creation:   June 21, 1991
-- Author:     Len Bass
-- Description: Demonstrate use of Ada interface to Serpent
--              This program places data for the spider chart
--              into shared data and retrieves the data entered by
--              the operator
-- -----

with Text_IO; use Text_IO;
with Serpent;
with S_Types; use S_types;
with SpiderA;
GREEN_STATUS: constant := 0;
YELLOW_STATUS: constant := 1;
RED_STATUS: constant := 2;

procedure Spider is

  package Int_IO is new Integer_IO(integer); use Int_IO;
  package Flt_IO is new Float_IO(long_float); use Flt_IO;

  --*****
  -- Serpent-specific defs
  --*****

  Transaction : S_Types.Transaction_Type;      -- transaction handle
  cmc: SpiderA.cc_sdd                          -- shared data variables
  sensor_record: SpiderA.sensor_sdd            -- shared data variables
  cc1_id, cc2_id, sensor_id: id_type           -- object instances
  Changed_id      : S_Types.Id_Type;           -- ID of returned
                                              shared data

  temporary      : integer;
  Change_Instance_Type : change_type;
  Component_Type  : shared_data_types;
  Change_List     : LIST;
  Component_Node  : NODE;
  Component_Name  : string(1..32);
  String_Data     : string(1..32);
  Integer_Data    : integer;
  Real_Data       : long_float;

  *****

```

## Spider Example

```
procedure Get_Data_Value is

    -- PURPOSE
    -- This procedure retrieves only the changed components for a record.
    --
begin
    --
    -- verify that change type is modify
    -- if not there is something wrong
    --
    Change_Instance_Type := Serpent.Get_Change_Type (Transaction,
                                                    Changed_id);
    If Change_Instance_Type /= MODIFY then
        Text_IO.Put_Line("Error in Change Type");
    end if;
    --
    -- now get list of changed components
    --
    Change_List := Serpent.Create_Changed_Component_List (Transaction,
                                                         Changed_id);

    Component_Node := Serpent.Get_First_Node (Change_List);

    while Component_Node /= NULL loop
        Serpent.Get_Component_Name (Component_Node, Component_Name);
        Text_IO.Put (Component_Name);
        Text_IO.Put ("  ");
        Component_Type :=
            Serpent.Get_Shared_Data_Type ("sensor_sdd", Component_Name);
    --
    -- Switch based on type of component
    --
    case Component_Type is
        when sd_string =>
            Serpent.Get_Shared_Data_String ( Transaction,
                                             Changed_id,
                                             Component_Name,
                                             String_Data);
            Text_IO.Put (String_Data);
            Text_IO.Put_Line ("");

        when sd_real =>
            Serpent.Get_Shared_Data_Real ( Transaction,
                                           Changed_id,
                                           Component_Name,
                                           Real_Data);
            Flt_IO.Put (Real_Data);
            Text_IO.Put_Line ("");

        when sd_integer =>
            Serpent.Get_Shared_Data_Integer (Transaction,
                                             Changed_id,
```

```

        Component_Name,
        Integer_Data);
    Int_IO.Put(Integer_Data);
    Text_IO.Put_Line("");
    when OTHERS =>
        Text_IO.Put_Line("type not in list to process");
    end case;

    Component_Node := Serpent.Get_Next_Node(Change_List,
        Component_Node);

    end loop;
    Text_IO.Put_Line("*****");
    return;
end;
--
*****
procedure Initialize_Sensor_Record (
    site_abbreviation : in string;
    status : in integer;
    site : in string;
    etro : in string;
) is

    -- PURPOSE
    -- This procedure initializes all of the data for a sensor shared
data record.
    --
begin
    sensor_record.site_abbr := site_abbreviation & ASCII.NUL;
    sensor_record.status := status;
    sensor_record.site := site & ASCII.NUL;
    set_undefined(sd_string.sensor_record.last_message);
    set_undefined(sd_buffer, sensor_record.rfo);
    sensor_record.etro := etro & ASCII.NUL;
    sensor_id := Serpent.Add_Shared_Data(
        Transaction,"sensor_sdd","",sensor_record'address);
--
-- now add two communication lines for the new sensor
--

    comm_line.from := sensor_id;
    comm_line.to := cc1_id;
    set_undefined(sd_string,comm_line.etro);
    comm_line.status := GREEN_STATUS;
    Changed_id := Serpent.Add_Shared_Data(
        Transaction,"communication_line_sdd","",comm_line'address);
    comm_line.to := cc2_id;
    Changed_id := Serpent.Add_Shared_Data(
        Transaction, "communication_line_sdd","",comm_line'address);
    return;
end;
--
*****

```

## Spider Example

```
begin

  Serpent.Serpent_Init(FD.MAIL_BOX, FD.ILL_FILE);
  Transaction := Serpent.Start_Transaction;
  if Serpent.get_status /= ok then
    Serpent.print_status ("bad status from start transaction");
    return;
  end if;

--
--   create shared data for the two correlation centers
--
  cc1_id := Serpent.Add_Shared_Data(
    Transaction, "cc_sdd", "name", "CMC" address);
  temporary := GREEN_STATUS;
  Serpent.Put_Shared_Data(
    Transaction, cc1_id, "cc_sdd", "status", temporary address);
  cc2_id := Serpent.Add_Shared_Data(
    Transaction, "cc_sdd", "name", "OFT" address);
  Serpent.Put_Shared_Data(
    Transaction, cc2_id, "cc_sdd", "status", temporary address);

--
--   create sensor and communication records in shared data
--
  Initialize_Sensor_Record(
    "GS1", GREEN_STATUS, "Ground Station 1", "16/1245Z");
  Initialize_Sensor_Record(
    "GS2", GREEN_STATUS, "Ground Station 2", "16/1634Z");
  Initialize_Sensor_Record(
    "GS3", GREEN_STATUS, "Ground Station 3", "12/1245Z");
  Initialize_Sensor_Record(
    "CLR", YELLOW_STATUS, "Clear", "10/1145Z");
  Initialize_Sensor_Record(
    "THL", GREEN_STATUS, "Thule", "16/1255Z");
  Initialize_Sensor_Record(
    "FYL", RED_STATUS, "Fylingdales", "16/1245Z");
  Initialize_Sensor_Record(
    "BLE", GREEN_STATUS, "Beale", "06/1325Z");
  Initialize_Sensor_Record(
    "OTS", YELLOW_STATUS, "OTS", "08/1245Z");
  Initialize_Sensor_Record(
    "ELD", GREEN_STATUS, "El Dorado", "13/0245Z");
  Initialize_Sensor_Record(
    "WRB", RED_STATUS, "Warner Robins", "11/1856Z");
  Initialize_Sensor_Record(
    "SHY", GREEN_STATUS, "Shemya", "14/1254Z");
  Initialize_Sensor_Record(
    "CAV", GREEN_STATUS, "Cavalier", "09/0529Z");

--
--   commit transaction.  After this procedure call, the data is available
```

```

-- to Serpent for display to the end user
--
Serpent.Commit_Transaction(Transaction);
if Serpent.get_status /= ok then
  Serpent.print_status ("bad status from Commit_Transaction");
  return;
end if;

--
-- get changes
--
  loop
    Transaction := Serpent.Get_Transaction;
    Changed_id := Serpent.Get_First_Changed_Element(Transaction);

    while Changed_id /= S_Types.Null_ID loop
      Get_Data_Value;
      Changed_id := Serpent.Get_Next_Changed_Element(Transaction);
    end loop;

    Serpent.Purge_Transaction(Transaction);
  end loop;

  Serpent.Serpent_Cleanup;
end Spider;

```

## Spider Example

## REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION <b>Unclassified</b>			1b. RESTRICTIVE MARKINGS <b>None</b>		
2a. SECURITY CLASSIFICATION AUTHORITY <b>N/A</b>			3. DISTRIBUTION/AVAILABILITY OF REPORT <b>Approved for Public Release Distribution Unlimited</b>		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE <b>N/A</b>					
4. PERFORMING ORGANIZATION REPORT NUMBER(S) <b>CMU/SEI-91-UG-7</b>			5. MONITORING ORGANIZATION REPORT NUMBER(S) <b>CMU/SEI-91-UG-7</b>		
6a. NAME OF PERFORMING ORGANIZATION <b>Software Engineering Institute</b>		6b. OFFICE SYMBOL (if applicable) <b>SEI</b>	7a. NAME OF MONITORING ORGANIZATION <b>SEI Joint Program Office</b>		
6c. ADDRESS (City, State and ZIP Code) <b>Carnegie Mellon University Pittsburgh PA 15213</b>			7b. ADDRESS (City, State and ZIP Code) <b>ESD/AVS Hanscom Air Force Base, MA 01731</b>		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION <b>SEI Joint Program Office</b>		8b. OFFICE SYMBOL (if applicable) <b>ESD/AVS</b>	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER <b>F1962890C0003</b>		
8c. ADDRESS (City, State and ZIP Code) <b>Carnegie Mellon University Pittsburgh PA 15213</b>			10. SOURCE OF FUNDING NOS.		
			PROGRAM ELEMENT NO <b>63752F</b>	PROJECT NO. <b>N/A</b>	TASK NO <b>N/A</b>
			WORK UNIT NO. <b>N/A</b>		
11. TITLE (Include Security Classification) <b>Serpent: Ada Application Developer's Guide</b>					
12. PERSONAL AUTHOR(S) <b>User Interface Project</b>					
13a. TYPE OF REPORT <b>Final</b>		13b. TIME COVERED FROM TO		14. DATE OF REPORT (Yr., Mo., Day) <b>June 1991</b>	
15. PAGE COUNT <b>104</b>					
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)  <b>Serpent, UIMS, user interface management system, user interface generators, Ada, application development</b>		
FIELD	GROUP	SUB. GR.			
19. ABSTRACT (Continue on reverse if necessary and identify by block number)  <b>Serpent is a user interface management system (UIMS) that supports the development and implementation of user interfaces, providing an editor to specify the user interface and a runtime system that enables communication between the application and the end user. This manual describes how to develop applications using Serpent. Readers are assumed to have read and understood the concepts described in the <i>Serpent Overview</i>, as well as to have had experience using the Ada programming language.</b>					
(please turn over)					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <b>UNCLASSIFIED/UNLIMITED</b> <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS <input checked="" type="checkbox"/>			21. ABSTRACT SECURITY CLASSIFICATION <b>Unclassified, Unlimited Distribution</b>		
22a. NAME OF RESPONSIBLE INDIVIDUAL <b>John S. Herman, Capt, USAF</b>			22b. TELEPHONE NUMBER (Include Area Code) <b>(412) 268-7630</b>		22c. OFFICE SYMBOL <b>ESD/AVS (SEI)</b>

ABSTRACT —continued from page one, block 19



